



Oscillator - TCXO - TC18

Pin Type TCXO - 18.30 x 11.90 x 8.7mm

● Features

- High performance
- Good phase noise
- RoHS compliant

● General Specification

Type		TC18		
Frequency Range		1.00MHz to 40.00MHz		
		40.00MHz to 160.00MHz (Available, phase noise on request)		
Frequency Stability	at 25 °C	±1.0ppm max		
	vs. Temperature range	± 1.0ppm (0 to +50 °C)		
		± 1.5ppm (0 to +70 °C)		
		± 2.0ppm (-20 to +70 °C)		
		± 3.0ppm (-30 to +75 °C)		
		± 5.0ppm (-40 to +85 °C)		
	Aging first year	± 1ppm max		
vs Load Change of ±10%	± 0.1ppm			
vs Supply Voltage Change of ±5%	± 0.2ppm			
Temperature	Operating	0 to +50 °C		
	Storage	-40 to + 100 °C		
Input	Supply Voltage	3.0 ± 5% / 5.0 ± 5%		
	Current Consumption	10.0mA	20.0mA	
Output	Waveform	Clipping Sine	TTL	HCMOS
	Rise & Fall Time	-	10ns	10ns
	Load	10kΩ / 10pF	2TTL	15pF
	Symmetry	-	40/60%	40/60%
	Level	>1Vp-p	Voh: 2.4V / Vol: 0.4V	Voh: 0.9V / Vol: 0.1V
External Control Function	External Tuning Range	± 10ppm min		
	External Tuning Voltage	2.5V ± 2.0V		
Phase Noise	at 10Hz	-70dBc/Hz		
	at 100Hz	-100 dBc/Hz		
	at 1KHz	-130 dBc/Hz		
	at 10KHz	-140dBz/Hz		
	at 100KHz	-145dBc/Hz		

NEWXTAL

Website: www.newxtal.com

Email: hkcrystal@incnets.com

Oscillator - TCXO - TC18

● Frequency Stability Codes (ppm)

A = ± 1.0	B = ± 1.5	C = ± 2.0	D = ± 2.5	E = ± 3.0	F = ± 4.0
G = ± 5.0	H = ± 0.5				

● Operating Temperature Codes (°C)

A = 0 to +50	B = 0 to +70	C = -20 to +70	D = -30 to +75	E = -40 to +85	F = +10 to +70
G = -40 to +60	H = -30 to +80	I = -10 to +40	J = -40 to +70	K = -10 to +60	L = -30 to +70

● Marking

Holder Type

Frequency + M(MHz) + Date code (Year Code + Month Code)

NEWXTAL (Company brand)


Year Code:

2001	2002	2003	2004	2005	2006	2007	2008	2009	2010	2011	2012
1	2	3	4	5	6	7	8	9	10	11	12

Month Code:

Jan	Feb	March	Apr	May	June	July	August	Sept	October	Nov	Dec
A	B	C	D	E	F	G	H	I	J	K	L

For Example:



● Ordering Information

Holder	Type	SMD Size	Stability	Temperature	Input Voltage	Output Waveform	Frequency	Lead-free	Packing
			(ppm)	(°C)	(V)				
TC= TCXO VT= VC(TCXO)	18=TC18	Blank= N/A	See tables		1=3.3 2=5.0 3=3.0 4=2.8	0 = Clipping Sine 1 = TTL 2 = HCMOS	xx.xxM	LF=leadfree	Blank: bulk
			± 1.0	0 to +70					
TC	18		A	B	2	0		LF	

For Example: **TC18AB20-10.000MLF**


NEWXTAL

Website: www.newxtal.com

Email: hkcrystal@incnets.com

Oscillator - TCXO - TC18

• Dimensions

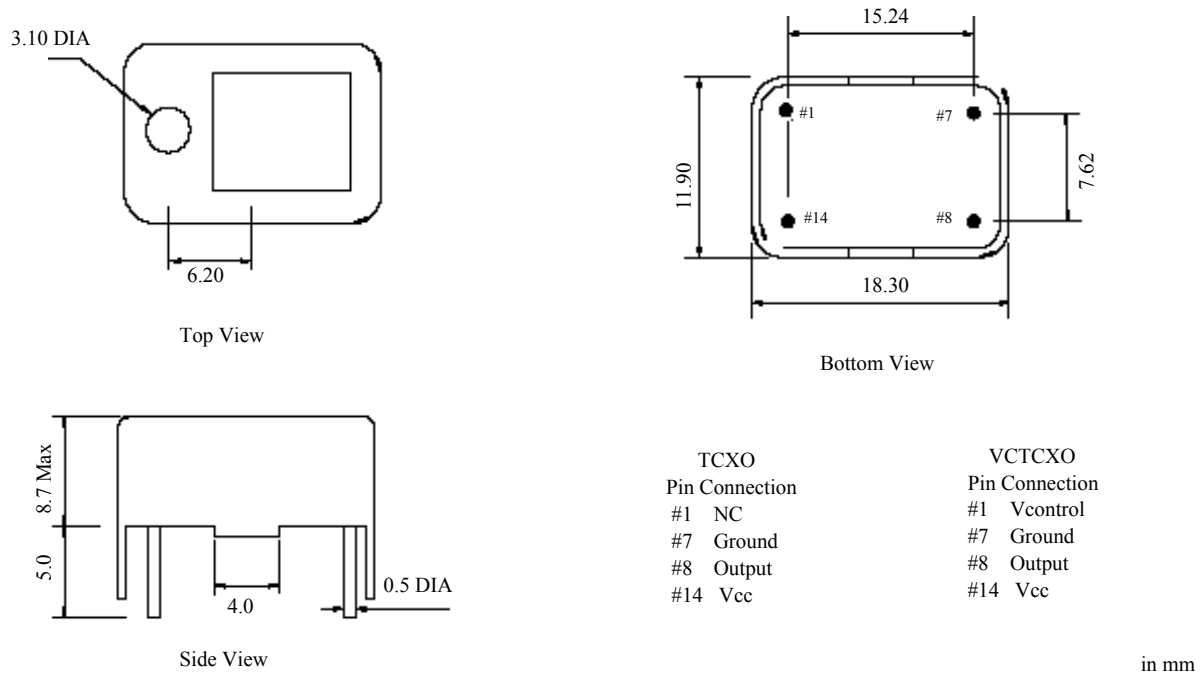

• Packing

Bulk.

• Wave Soldering Profile

