



Crystal Oscillator - CXO - Half size / Dip 08

Pin Type - 13.2 x 13.2 x 5.08mm

● Features

- High performance
- Low cost
- RoHS compliant

● General Specification

Type		Half Size - Dip 08	
Frequency Range		1.00MHz to 150.00MHz	
Frequency Stability (Overall)		± 10ppm to ± 100ppm	
Input	Current Consumption	25mA (1.000 - 35.999MHz) 60mA (36.00 - 69.999MHz) 80mA (70.00 - 150.00MHz)	20mA (1.000 - 35.999MHz) 40mA (36.00 - 69.999MHz) 60mA (70.00 - 150.00MHz)
	Supply Voltage	5.0V ± 10%	3.3V ± 10%
Temperature Range	Operating	-10 to +60°C or custom-designed	
	Storage	-40 to +85°C or custom-designed	
Output	Waveform	TTL	HCMOS
	Load	10TTL	15pF
	Symmetry	40/60% or 45/55%	
	Rise Time	TR	10nS max.
	Fall Time	TF	10nS max.
	Voltage	VoH	TTL: 2.4V min
VoL		TTL: 0.4V max	HCMOS: 0.1V max
Tri-State Function (Pin 1)		Enable: Tri-state Disable: NC	
Start-Up Time		10mS max	
Aging First Year		± 5ppm max	

NEWXTAL - New Crystal

Website: www.newxtal.com

Email: sales@newxtal.com

Crystal Oscillator - CXO - Half size / Dip 08

● Frequency Stability Codes (ppm)

1 = ± 20	2 = ± 25	3 = ± 30	4 = ± 50	5 = ± 100	7 = ± 35
8 = ± 15	a = ± 10	b = ± 70			

* Frequency stability includes stability at 25°C, operating temperature range, supply voltage and aging 1st year.

● Operating Temperature Range Codes(°C)

1 = 0 to +70	2 = -10 to +70	3 = -20 to +70	4 = -40 to +85	5 = -10 to +60	6 = -20 to +60
7 = 0 to +100	8 = 0 to +60	9 = -30 to +65	A = -55 to +125	B = -30 to +80	C = -10 to +50

● Marking

Holder

Frequency + M (MHz) + Date code (Year Code + Month Code)

NEWXTAL (Company brand)

Year Code:

2001	2002	2003	2004	2005	2006	2007	2008	2009	2010	2011	2012
1	2	3	4	5	6	7	8	9	10	11	12

Month Code:

Jan	Feb	March	Apr	May	June	July	August	September	October	Nov	December
A	B	C	D	E	F	G	H	I	J	K	L

For Example:



● Ordering Information

Holder	Type	SMD Size	Stability	Temperature	Input voltage	Tri-state	Symmetry	Pullability	Frequency	Lead-free	Packing
			(ppm)	(°C)	(V)			(ppm)			
C= CXO	08=Half size	Blank= N/A	See tables		1=3.3 2=5.0	N = No T = Yes	45 = 45/55% 46 = 40/60%		xx.xxM	LF=leadfree	Blank: Bulk or Tube
			± 50	-10 to +70				N = N/A			
C	08		4	2	1	N	45	N		LF	

For Example: C08421N45N-10.000MLF


NEWXTAL - New Crystal

Website: www.newxtal.com


Email: sales@newxtal.com

Crystal Oscillator - CXO - Half size / Dip 08


• Dimensions



Top View

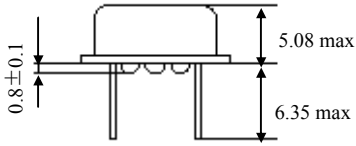

Side View



Bottom View

Pin Connection
#1 NC or Tri-state
#4 Ground
#5 Output
#8 Supply voltage


in mm

• Packing

Bulk or 40pcs packed in anti-static plastic tube.

• Wave Soldering Profile

Bath temperature (°C)

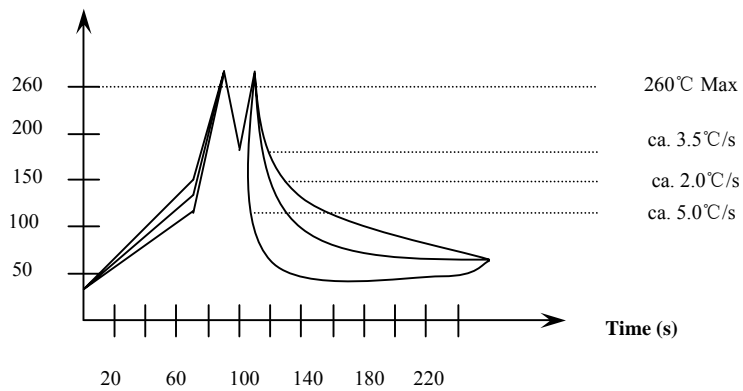

NEWXTAL - New Crystal

Website: www.newxtal.com

Email: sales@newxtal.com